


# Berlin Wall-hung Toilet set with Geberit In-wall Carrier



## INCLUDED

- ALPS Wall-hung Toilet Bowl KW-99046  
Flush rate: 1.6/1.1 gpf  
Quick-release & Soft Close seat
- Geberit In-wall System  
For 2x6 construction 111.335.00.5  
For 2x4 construction 111.798.00.1
- Geberit Sigma01 Actuator Plate 115.770.11.5



cUPC Certified



Water Sense Compliant



5 Years Guarantee



Lifetime Warranty

## Features

### Easy cleaning

clean the entire floor with a damp mop, no bending or kneeling

### Improved accessibility

requires less space than a standard toilet, enhancing safety and comfort; adjustable bowl height meets personal preference or ADA guidelines

### Water savings

built-in dual-flush, 1.6 / 0.8 GPF saves thousands of gallons every year

### Superior function

engineered Geberit fill and flush valves eliminate problematic chains and flappers that corrode and fail

### Round Bowl

### Glazed ceramic

### Adjustable bowl height

### Quick-release, soft-close seat

# Berlin

## Wall-Mounted Toilet

**KW-99046**



### Features:

- Space saving, wall-hung design
- Round Bowl
- Glazed ceramic
- Adjustable bowl height
- Quick-release, soft-close seat
- Flushing Rate: 1.6/1.1 gpf

### Installation:


- Wall hung

### Specifications:

- N.W: 60 lb.
- D 20 12/16" x W 14 15/16" x H 15 7/15"

### Included Parts:

- Wall-Hung Bowl
- Stainless Steel Toilet Seat Hardware
- Quick-Release Seat
- Mounting Hardware

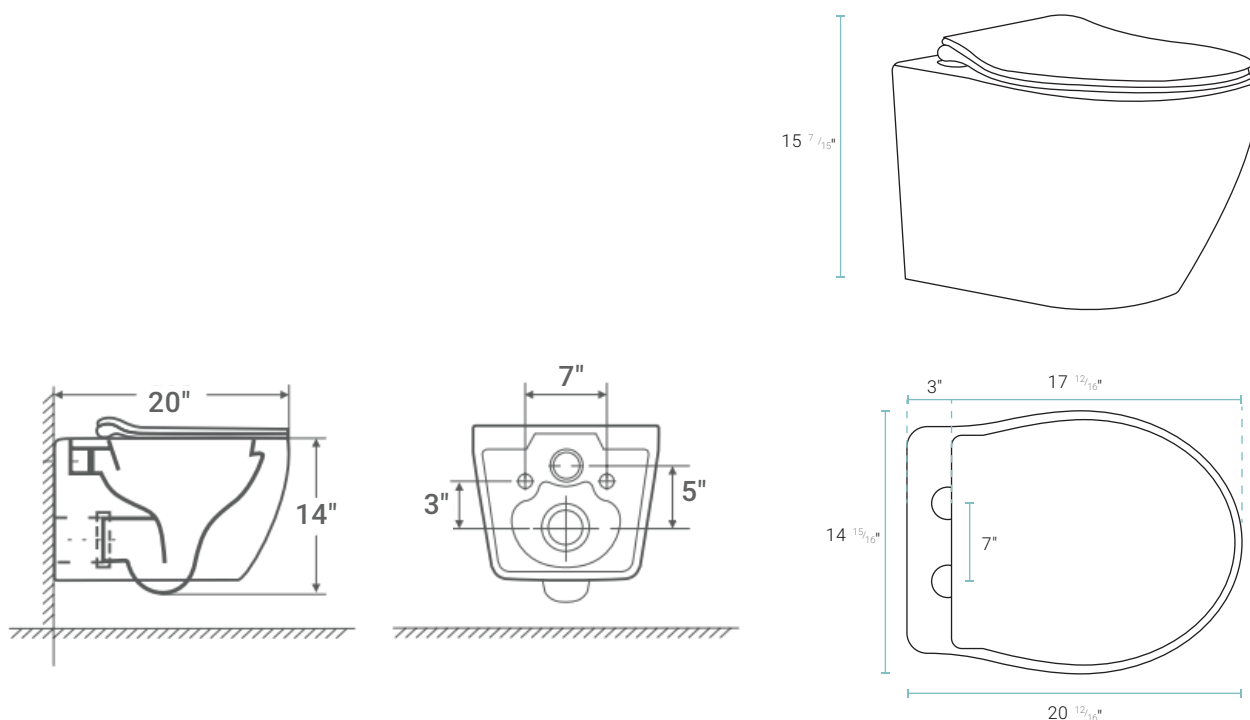

It's compatible with most in-wall carrier system brands.



cUPC Certified



Water Sense Compliant



5 Years Guarantee



Lifetime Warranty

GEBERIT INSTALLATION SYSTEM  
For 1.6/0.8 GPF (6/3 LPF) Wall-Hung Toilets, 2x4 Installations

PRODUCT SPECIFICATIONS

In-Wall Duofix carrier system and Sigma concealed tank with actuator flush panel or pneumatic push button for washdown wall-hung toilets. System shall fit within minimum 3-1/2" (90 mm) framing wall or plumbing chase, with wood construction or steel framing members placed 19-3/4" (500 mm) apart. Framing members should be capable of supporting a 880 pound (400 kg) load without damage to the wall. Water supply shall have flow diameter no smaller than 1/2" (13 mm) copper tube, and a minimum flow pressure of 2 PSI (0.01 MPa). The toilet bowl shall be a third party listed, 2-hole wall-hung 1.6 GPF (6 LPF) or 1.28 GPF (4.8 LPF) single-flush, 1.6/0.8 GPF (6/3 LPF) or 1.28/0.8 GPF (4.8/3 LPF) dual flush. The carrier frame shall be adjustable for bowl rim heights from 15" to 19" (381 to 483 mm). Actuator flush panels shall be diecast zinc, molded plastic or fabricated stainless steel and plated to preserve material integrity. All components shall be compliant with applicable codes and product standards.

FEATURES

- Water consumption – Dual-flush system, 1.6/0.8 GPF (6/3 LPF)
- Anti-siphon fill valve
- Impact resistant high density polyethylene (HDPE) tank, insulated to prevent condensation
- 16-gauge, powder-coated, structural-steel tubing rated to 880 lbs. (400 kg) without damage to finished wall or carrier unit
- Bowl rim height adjustments from 15" to 19" (381 to 483 mm)
- 49" (1245 mm) frame height
- For finished walls up to 3-1/2" (9cm) thick
- For use with Geberit Sigma actuator plates (not included)
- Includes installation and rough-in materials

Not intended for installation within outside walls or for use with water supply temperatures less than 32°F (0°C) or greater than 65°F (18°C).

- Complies with the latest editions of:
- ASME: A112.6.2, A112.19.5, A112.19.14
  - ANSI Z124.4
  - CSA B125.3
  - ANSI/ASSE 1002
  - IAPMO PS-50
  - UNAR / UNAR-HET
  - ASME A112.19.2
  - This concealed tank is WaterSense® listed or compliant when used in combination with the toilet bowl models listed on page 3 of this sheet
  - State of Massachusetts listed


WARRANTY

- Limited lifetime warranty on tank and carrier, 10-year warranty on fill valve and flush valve. One-year warranty on actuator flush plates.

Products marked with  comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.

Where water closet grab bars are required and corresponding reinforcement provided as outlined in the latest NYC Building Code and Federal FHA Guidelines, the installed product complies both for grab bars installed at the time of initial construction as well as for grab bars planned for future installation.

| Model No.    | Description                                         |
|--------------|-----------------------------------------------------|
| 111.798.00.1 | Carrier frame with 1.6/0.8 GPF Sigma Concealed Tank |

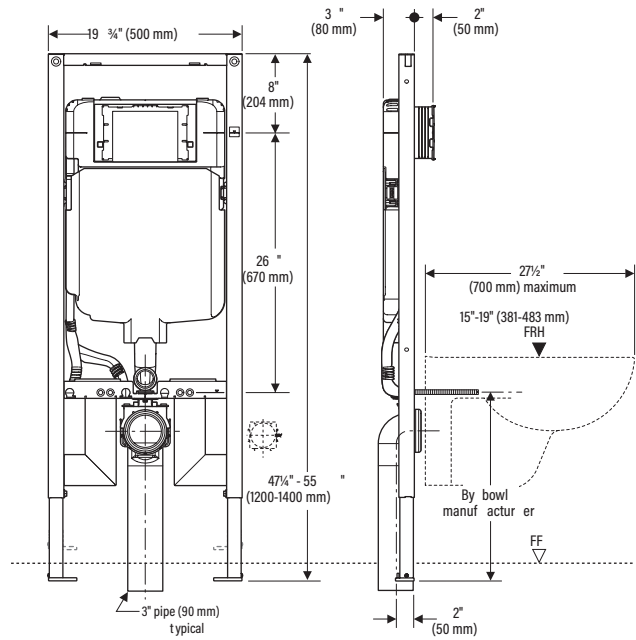

ARCHITECT/ENGINEER APPROVAL

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model Specified: \_\_\_\_\_

Variations Specified: \_\_\_\_\_

Customer/Wholesaler: \_\_\_\_\_

Contractor: \_\_\_\_\_

Architect: \_\_\_\_\_

GEBERIT INSTALLATION SYSTEM  
For 1.6/0.8 GPF (6/3 LPF) Wall-Hung Toilets, 2x6 Installations

PRODUCT SPECIFICATIONS

In-Wall Duofix carrier system and Sigma concealed tank with actuator flush panel or pneumatic push button for washdown wall-hung toilets. System shall fit within minimum 5-1/2" (146 mm) framing wall or plumbing chase, with wood construction or steel framing members placed 19-3/4" (500 mm) apart. Framing members should be capable of supporting a 880 pound (400 kg) load without damage to the wall. Water supply shall have flow diameter no smaller than 1/2" (13 mm) copper tube, and a minimum flow pressure of 2 PSI (0.01 MPa). The toilet bowl shall be a third party listed, 2-hole wall-hung 1.6 GPF (6 LPF) or 1.28 GPF (4.8 LPF) single-flush, 1.6/0.8 GPF (6/3 LPF) or 1.28/0.8 GPF (4.8/3 LPF) dual-flush. The carrier frame shall be adjustable for bowl rim heights from 15" to 19" (381 to 483 mm). Actuator flush panels shall be diecast zinc, molded plastic or fabricated stainless steel and plated to preserve material integrity. All components shall be compliant with applicable codes and product standards.

FEATURES

- Water consumption – Dual-flush system, 1.6/0.8 GPF (6/3 LPF)
- Anti-siphon fill valve Type380
- Impact resistant high density polyethylene (HDPE) tank, insulated to prevent condensation
- 16-gauge, powder-coated, structural-steel tubing rated to 880 lbs. (400 kg) without damage to finished wall or carrier unit
- Bowl rim height adjustments from 15" to 19" (381 to 483 mm)
- 49" (1245 mm) frame height
- For finished walls up to 3-1/2" (9cm) thick
- For use with Geberit Sigma actuator plates (not included)
- Includes installation and rough-in materials

Not intended for installation within outside walls or for use with water supply temperatures less than 32°F (0°C) or greater than 65°F (18°C).

Complies with the latest editions of:

- ASME: A112.6.2, A112.19.5, A112.19.14
- ANSI Z124.4
- CSA B125.3
- ANSI/ASSE 1002
- IAPMO PS-50
- UNAR / UNAR-HET
- ASME A112.19.2
- This concealed tank is WaterSense® listed or compliant when used in combination with the toilet bowl models listed on page 3 of this DOCUMENT
- State of Massachusetts listed


WARRANTY

- Limited lifetime warranty on tank and carrier, 10-year warranty on fill valve and flush valve. One-year warranty on actuator flush plates

Products marked with  comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.

Where water closet grab bars are required and corresponding reinforcement provided as outlined in the latest NYC Building Code and Federal FHA Guidelines, the installed product complies both for grab bars installed at the time of initial construction as well as for grab bars planned for future installation.

| Model No.    | Description                                          |                                                                                      |
|--------------|------------------------------------------------------|--------------------------------------------------------------------------------------|
| 111.335.00.5 | Carrier frame with 1.60/0.8 GPF Sigma Concealed Tank |  |
| 111.902.00.5 | Carrier frame with 1.28/0.8 GPF Sigma Concealed Tank |  |

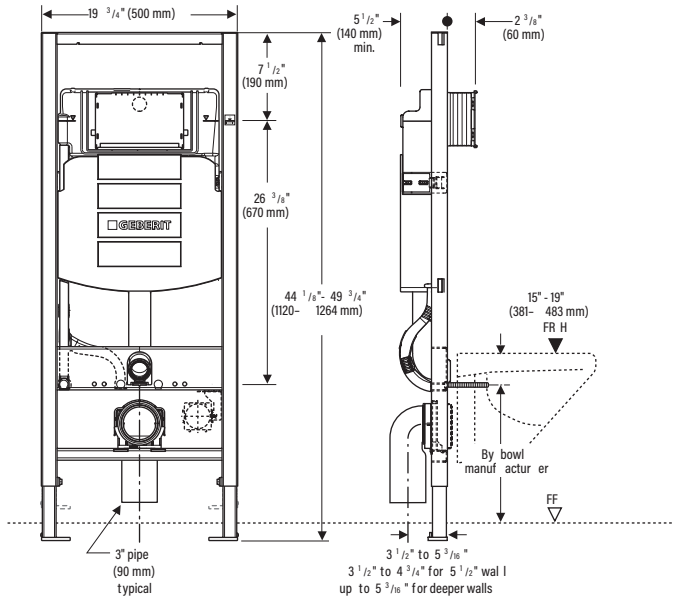

**ARCHITECT/ENGINEER APPROVAL**

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model Specified: \_\_\_\_\_

Variations Specified: \_\_\_\_\_

Customer/Wholesaler: \_\_\_\_\_

Contractor: \_\_\_\_\_

Architect: \_\_\_\_\_

# GEBERIT SIGMA01 ACTUATORS

## For Sigma Concealed Tanks, 2x6 and 2x4 Installations

### SPECIFICATIONS

Actuators for concealed tank and carrier system. Actuator flush plates and push buttons shall be molded plastic and plated to guard against scratches. All components shall be compliant with applicable codes and product standards.

### FEATURES

- Designed to maintain appearance push after push
- Moving parts are accessible behind actuator flush plate
- Made of molded plastic and plated
- Available in a variety of unique combinations of finish/color
- Incorporates water saving possibilities when used with Geberit dual-flush tanks 1.6 GPF (6 LPF) and 0.8 GPF (3 LPF) or 1.28 GPF (4.8 LPF) and 0.8 GPF (3 LPF)
- Includes mounting frame and hardware

### WARRANTY

- One-year limited warranty


### Dual-Flush Actuators, Sigma 2x6 and 2x4 Installation



| Style                                                                                     | Material | Finish                       | Model No.    |
|-------------------------------------------------------------------------------------------|----------|------------------------------|--------------|
|  Sigma01 | Plastic  | Alpine White                 | 115.770.11.5 |
|                                                                                           |          | Polished Chrome              | 115.770.21.5 |
|                                                                                           |          | Matte Chrome                 | 115.770.JQ.5 |
|                                                                                           |          | Brass Galvanized <b>NEW!</b> | 115.770.DT.5 |
|                                                                                           |          | Jet Black <b>NEW!</b>        | 115.770.DW.5 |

### DIMENSIONS

#### Sigma01 Dual-Flush

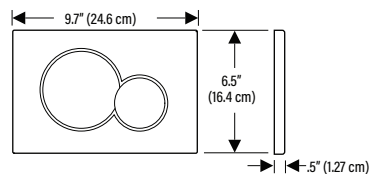

Products marked with  comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.



Geberit  
2100 S. Clearwater Drive  
Des Plaines, IL 60018  
USA

P 847-803-7777  
F 847-849-1845

[www.geberit.us](http://www.geberit.us)

© 2020 Geberit. Product specifications subject to change without notice.

### ARCHITECT/ENGINEER APPROVAL

|                       |           |
|-----------------------|-----------|
| Job Name:             |           |
| <hr/>                 |           |
| Date:                 | Quantity: |
| <hr/>                 |           |
| Model Specified:      |           |
| <hr/>                 |           |
| Variations Specified: |           |
| <hr/>                 |           |
| Customer/Wholesaler:  |           |
| <hr/>                 |           |
| Contractor:           |           |
| <hr/>                 |           |
| Architect:            |           |
| <hr/>                 |           |