



## Veil® | K-1381-TBH

One-piece elongated toilet with skirted trapway, dual-flush

### Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Dual flush offers a choice of 0.8 or 1.28 gpf (3.0 or 4.8 lpf)
- Left-hand Polished Chrome trip lever
- Additional trip lever finishes available
- 2-1/8" (54 mm) glazed trapway
- Skirted trapway simplifies cleaning
- Quiet-Close™ elongated lid and seat prevents slamming
- Designed to support easier transfers from wheelchair



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

- |   |             |
|---|-------------|
| 0 | White       |
| 7 | Black Black |

## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Accessibility standards may require controls to be located on the open side of the toilet.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ASME A112.19.2/CSA B45.1

ASME A112.19.14

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

## Included Components

- K-26801 ReadyLatch® Quiet-Close™ elongated toilet seat (QTY 1)

## Recommended Products/Accessories

- K-39525-L Left-hand trip lever

## Warranty

See website for detailed warranty information.


KOHLER® Toilets and Seats Limited Warranty

## Technical Information

|                       |                      |
|-----------------------|----------------------|
| Rough-in:             | Standard 12" (305mm) |
| Flush Type:           | Class Five           |
| Flush Rate:           | 1.28 gpf (4.5 lpf)   |
| Bowl Shape:           | Elongated            |
| Waste Outlet:         | Floor                |
| Trapway Size:         | 2-1/8" (54 mm)       |
| Trapway Type:         | Skirted              |
| Rim to Water Surface: | 5-9/16" (141 mm)     |

## Pressure/Fixture Supply Requirements

|                           |                    |
|---------------------------|--------------------|
| Minimum Flowing Pressure: | 15 psi (103.4 kPa) |
| Minimum Flow Rate:        | 1 gpm (3.8 l/min)  |

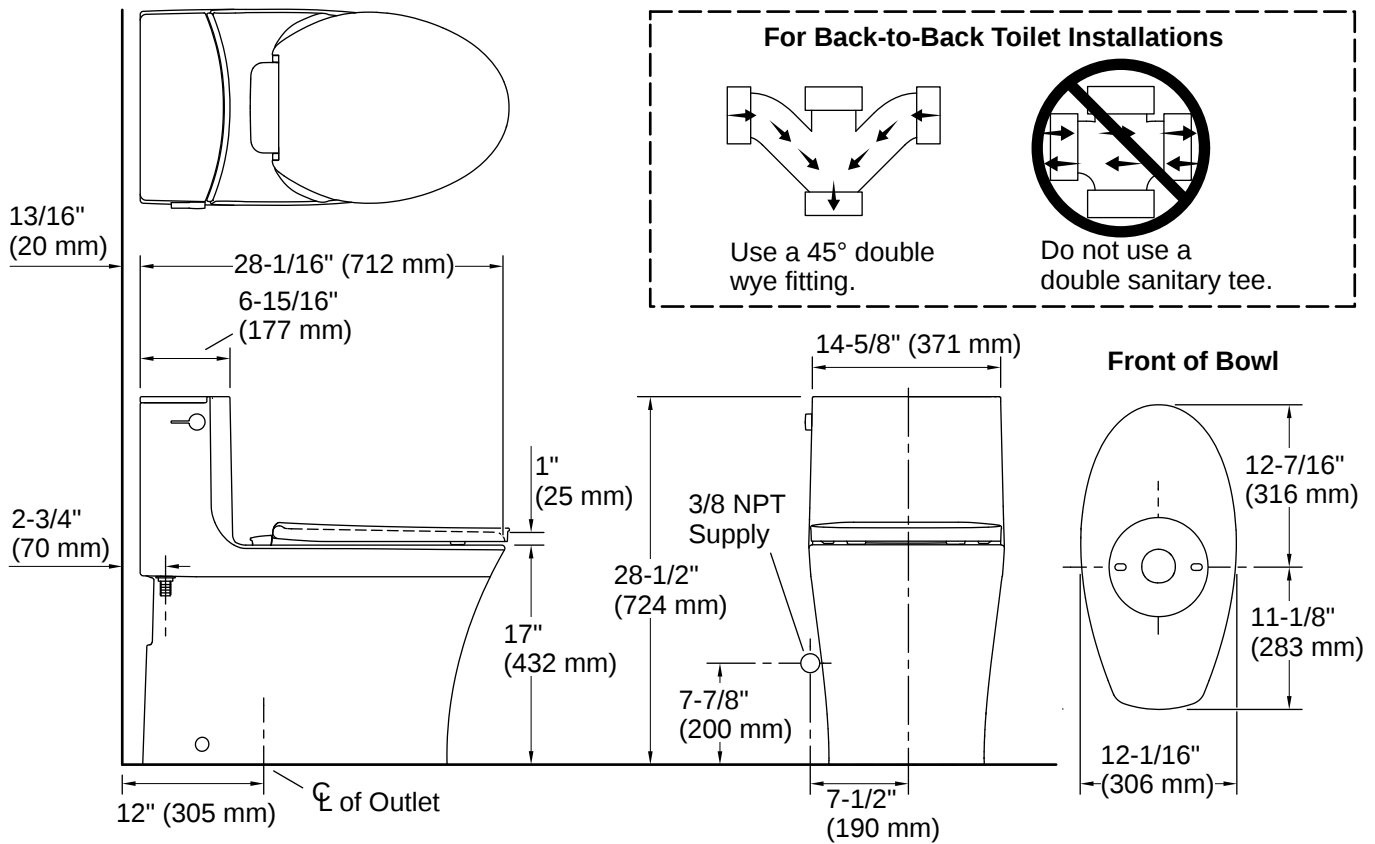

## Installation

- Standard 12" (305 mm) rough-in
- Supply line sold separately
- Requires mounting plate for heated seat installation (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.