

66" x 32" drop-in bath **K-1948** 

#### **Features**

- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Textured bottom surface
- Coordinates with other products in the Archer collection

#### Material

Acrylic

## Installation

- Reversible drain
- Drop-in

# **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

## **Recommended Products/Accessories**

K-23726 Drain treatment
K-31797 Slotted overflow bath drain kit
K-31795 Slotted overflow above-the-floor bath drain kit



ADA

## Codes/Standards

CSA B45.5/IAPMO Z124 ADA ICC/ANSI A117.1

# **KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty**

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	95	Ice™ Grey
	58	Thunder™ Grey
	7	Black Black™







**KOHLER**®


66" x 32" drop-in bath **K-1948** 

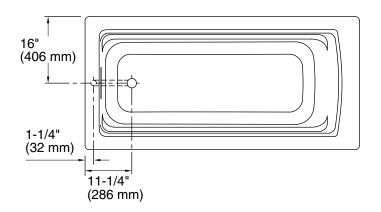

No change in measurements if connected with drain illustrated. (K-7272)



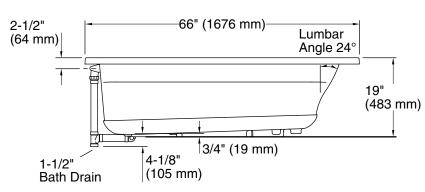



# **Technical Information**

All product dimensions are nominal.

Drain location: Reversible

Basin area, bottom: 50-3/8" x 19-5/8" (1280 mm x 498 mm)

Basin area, top: 57-5/16" x 24-1/16" (1456 mm x

611 mm)

Weight: 66 lbs (29.9 kg)

Minimum floor load: 44 lbs/ft² (214.8 kg/m²)

Water depth: 15-5/16" (389 mm)

Water capacity: 66 gal (249.8 L)

Cutout: Drop-in, 64-1/2" x 30-1/2" (1638 mm x

775 mm)

Minimum flat for 2-1/8" (54 mm)

door:

#### **Notes**

Measure your actual product for rough-in

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary

This product is designed for drop-in installation only. It is not suited for use in a three-wall alcove with an overhead shower.

ADA compliant when installed to the specific

requirements of these regulations.

