



One-piece compact elongated toilet with skirted trapway, 1.28 gpf

K-22695

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl
- Standard height
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Fully skirted trapway simplifies cleaning
- Quiet-Close™ elongated lid and seat prevents slamming

Installation

- Standard 12" (305 mm) rough-in
- Supply line sold separately
- Requires mounting plate for heated seat installation (sold separately)

Recommended Products/Accessories

K-20110 Brevia[™] Quiet-Close[™] elongated toilet seat 1362736 Mounting Plate Kit Exposed Wire

Included Components

K-22203 Highline® Quiet-Close™ elongated toilet seat K-90094-L (Qty 2)





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

0 White






Harken®

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

K-22695

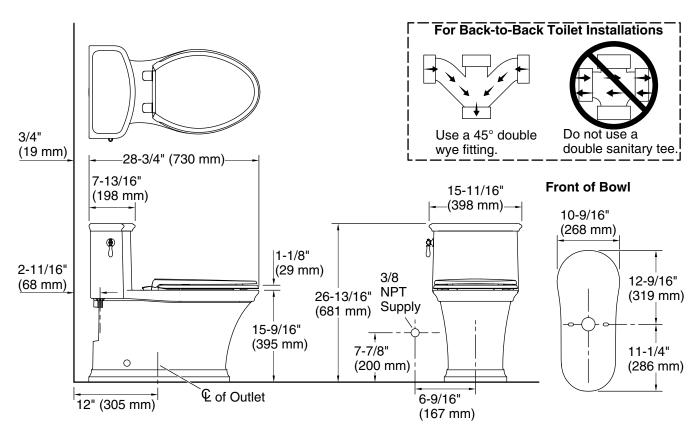

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor Bowl shape: Elongated Class Five Flush type: 2" (51 mm) Trap passageway:

7-13/16" x 5-1/8" (198 mm x 130 mm) Water surface size:

Rim to water 5-15/16" (151 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Template: Footprint, 1398502-7, required, included

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa) Min flowing 15 psi (103.4 kPa)

pressure:

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada 4-4-2025 22:44 - US/CA



Notes

Install this product according to the installation instructions.

