



Highline® | K-37740

Two-piece elongated toilet, 1.28 gpf

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/4" (57 mm) fully glazed trapway
- Equipped with Sloan FLUSHMATE® – Sloan® Valve Company



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| 7 | Black Black |

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Accessibility standards may require controls to be located on the open side of the toilet.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.



ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

Installation Type:	Floor-mount
Rough-in:	Standard 12" (305mm)
Flush Type:	Pressure Lite
Flush Rate:	1.28 gpf (4.8 lpf)
Bowl Shape:	Elongated
Waste Outlet:	Floor
Trapway Size:	2-3/16" (55 mm)
Trapway Type:	Exposed
Rim to Water Surface:	5-3/4" (146 mm)

Included Combo Skus

- K-4304 Elongated toilet bowl
- K-37920 Toilet tank, 1.28 gpf

Recommended Products/Accessories

- K-4650 Elongated toilet seat
- K-4650-A Elongated toilet seat with antimicrobial agent
- K-5420 Low-profile toilet bolt caps
- K-4731-C Elongated toilet seat with integrated handle and check hinge


Optional Products/Accessories

- K-7637 3/8" NPT angle supply with stop and annealed vertical tube

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

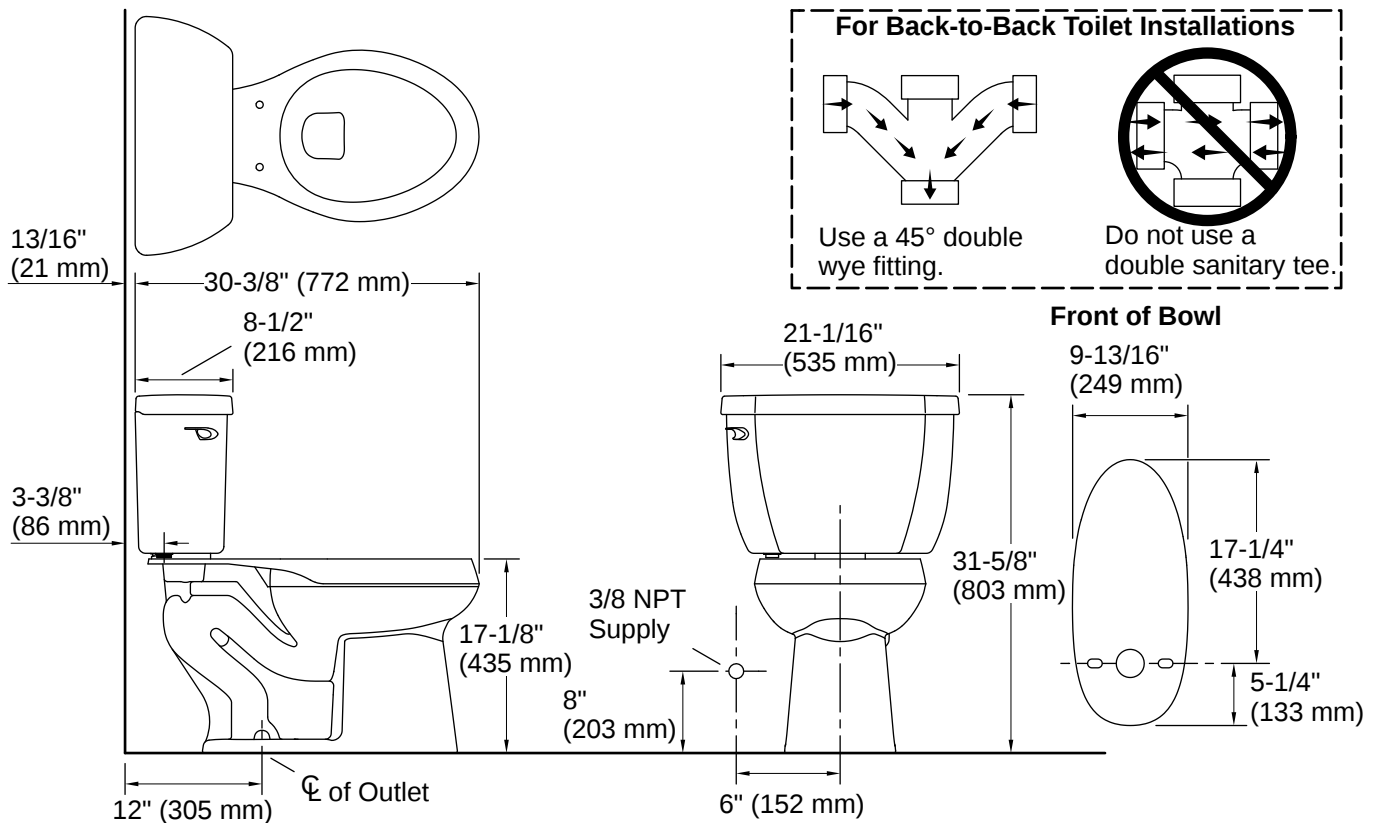

Installation

- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.