



One-piece compact elongated toilet with concealed trapway, 1.28 gpf

K-3940

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Concealed trapway and Clean Caps® low-profile bolt caps facilitate easier cleaning and enhance design
- Left-hand Polished Chrome trip lever
- Coordinates with other products in the Kathryn collection
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Eligible for consumer rebates in some municipalities
- Quiet-Close™ compact elongated lid and seat prevents slamming
- Quick-Release™ functionality allows seat to be removed easily from toilet for convenient cleaning
- AguaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush

Installation

- Standard 12" (305 mm) rough-in
- Supply line sold separately

Recommended Products/Accessories

K-4108 PureWash® E750 Elongated bidet toilet seat with remote control K-9131 Trip Lever 1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

Included Components

K-4733 Glenbury™ Quiet-Close™ elongated toilet seat





Codes/Standards

ASME A112.19.2/CSA B45.1 EPA WaterSense® ADA ICC/ANSI A117.1 **CSA B651** OBC

KOHLER® Toilets and Seats Limited Warrantv

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	7	Black Black™






Kathryn®

One-piece compact elongated toilet with concealed trapway, 1.28 gpf

K-3940

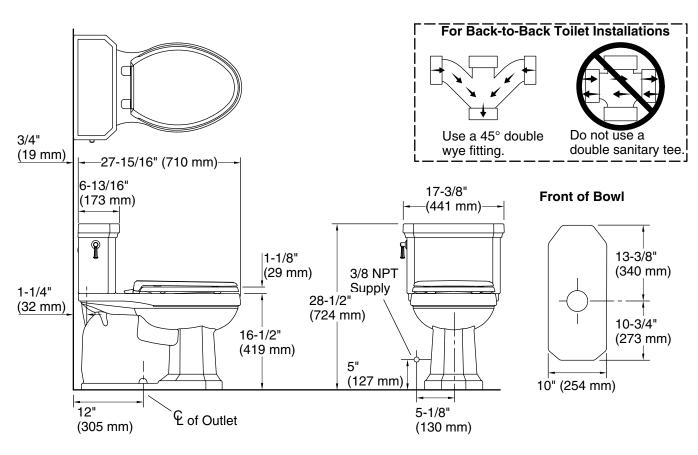

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor Bowl shape: Elongated AquaPiston Flush type: 2-1/8" (54 mm) Trap passageway:

10-1/2" x 7-1/2" (267 mm x 191 mm) Water surface size:

Rim to water 5-5/8" (143 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa) Min flowing 15 psi (103.4 kPa)

pressure:

Min flow rate: 1 gpm (3.8 lpm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

