TOTO®

MS776124CSFG.10

Drake® Two-Piece Toilet, 1.6 GPF, 10" Rough-In

FEATURES

- TORNADO FLUSH® system, (1.6 GPF/6.0 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Elongated front bowl and seat
- Universal Height
- Chrome plated trip lever
- 10" Rough-in, supply line sold separately

MODELS

- **MS776124CSFG.10 (#01)**
  With CEFIONTECT ceramic glaze & includes SS124 SoftClose® seat

COMPONENTS

- **C776CEFGT40.10**
  Elongated bowl with CEFIONTECT
- **ST776SA**
  Tank and cover only
- **SS124**
  SoftClose seat

OPTIONAL COMPONENTS

- **THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A**
  Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The two-piece TORNADO FLUSH system toilet shall be 1.6 GPF/6.0 LPF. Toilet shall be 10" rough-in. Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl, SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS776124CSFG.10#01



TORNADO FLUSH UNIVERSAL HEIGHT

CEFIONTECT

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®)
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)

MS776124CSFG.10


Drake® Two-Piece Toilet, 1.6 GPF, 10" Rough-In

SPECIFICATIONS

Water Use	1.6 GPF (6.0 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	9" x 6-7/8"
Trap Diameter	2-1/8"
Rough-in	10"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	**C776CEFG.10** 62 lbs. **ST776SA** 32 lbs.
Shipping Dimensions	**C776CEFG.10** 30-1/8" L x 15-1/4" W1 x 10-7/8" W2 x 17-3/4" H **ST776SA** 18-3/4" L x 8-7/8" W x 16-1/4" H


INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

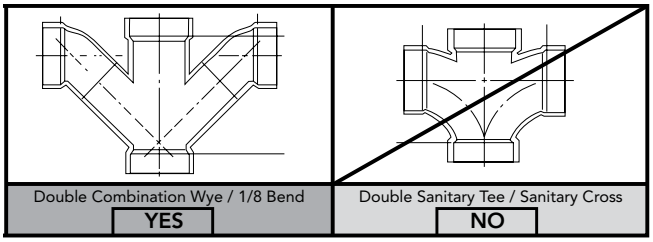

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 10" rough-in distance.

DIMENSIONS

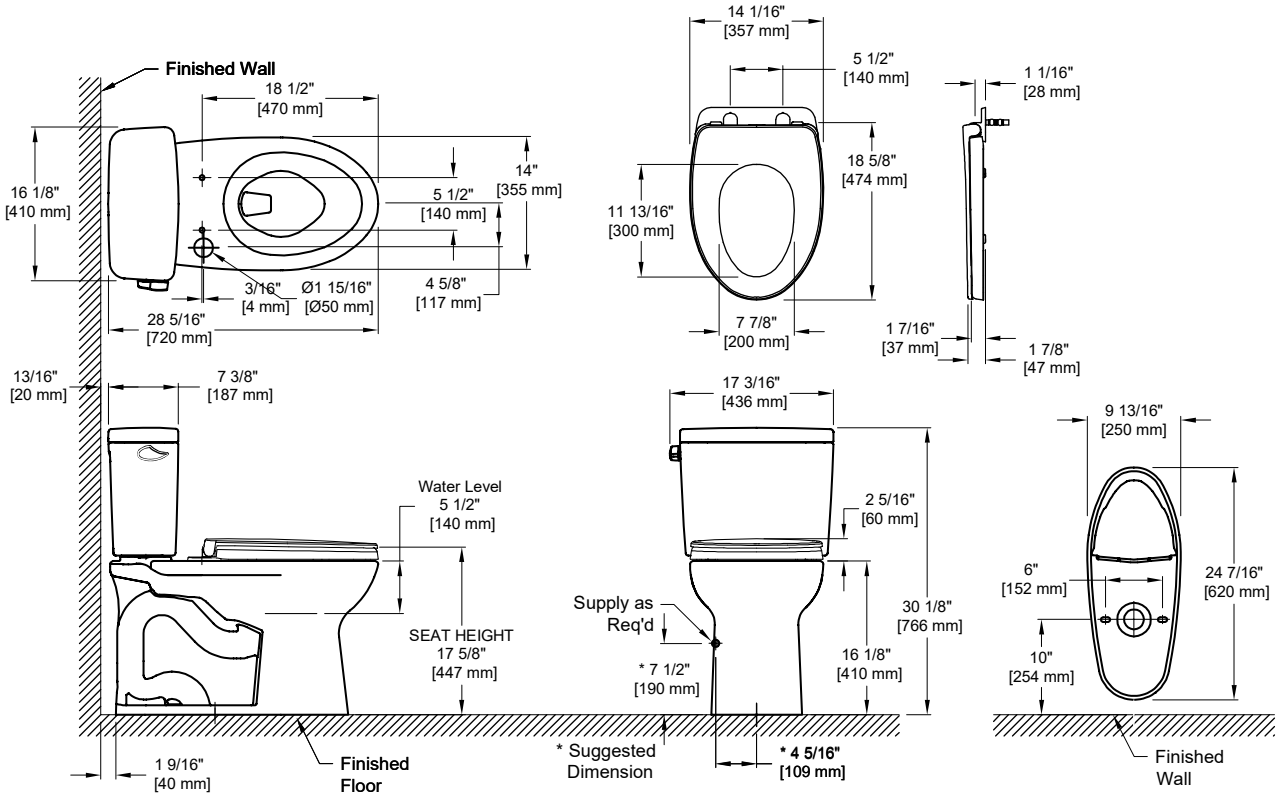

TOTO®

These dimensions and specifications are subject to change without notice