TOTO_®

MW6463446CEMFGN

Aquia_® IV WASHLET_®+ S5 One-Piece Toilet - 1.28 GPF/0.9 GPF

FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 GPF/0.9 GPF (4.8 LPF/3.4 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- UNIVERSAL HEIGHT
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl toilet and WASHLET+ S5 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Multifunction remote control with personalized memory settings for up to 4 users
- Night light illuminates the inside of the bowl

MODELS

MW6463446CEMFGN (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S5 with contemporary design

- CST646CEMFGNAT40
 Elongated bowl with CEFIONTECT
- **SW3446** WASHLET+ **S5**

OPTIONAL COMPONENTS

- TSU48.10 10" Unifit Rough-In
- TSU48.14 14" Unifit Rough-In
- THU848(01, #BN, #PN, #MBL)-A
 Trip Lever Cotton, Brushed Nickel, Polished Nickel, Matte
 Black

COLORS/FINISHES

#01 Cotton











PRODUCT SPECIFICATION

The one-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF/0.9 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, UNIVERSAL HEIGHT, complete skirted bowl and chrome push button

Toilet shall be TOTO Model MW6463446CEMFGN#01.

See SW3446 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO (cUPC_®), EPA WaterSense_®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements





Aquia_® IV WASHLET_®+ S5 One-Piece Toilet - 1.28 GPF/0.9 GPF

SPECIFICATIONS


Water Use	1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Water Surface	7" × 5"
Trap Diameter	2-1/4"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CST646CEMFGNAT40: 112 lbs SW3446: 15.4 lbs
Shipping Dimensions	CST646CEMFGNAT40 29-1/2" L x 17-5/8" W x 28-1/8" H SW3446: 24-3/8" L x 17-9/16" W x 7-7/16" H

See SW3446 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

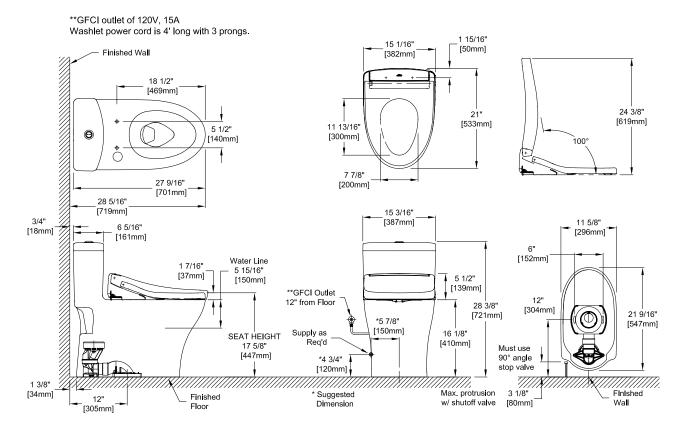



These dimensions and specifications are subject to change without notice