

Aquaflush 828

AQUABRASS

/ **14” x 14” recessed rainhead**

Specification sheet

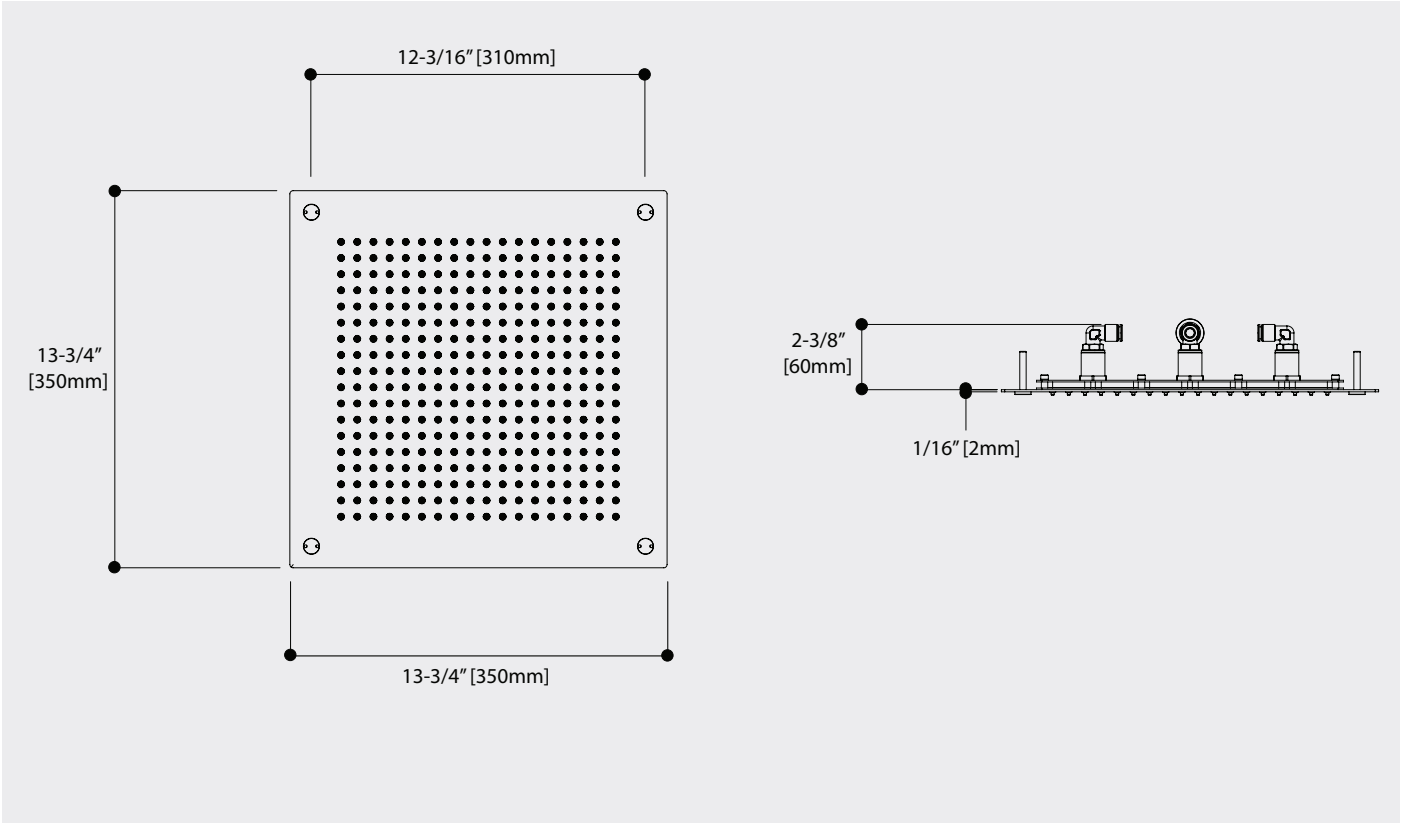

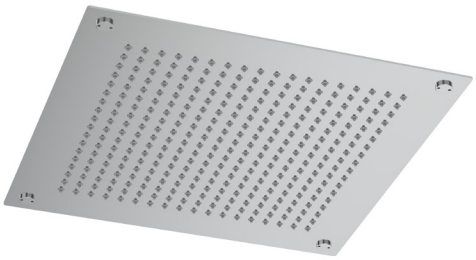

Plumbing Specifications

- Operating pressure min 22PSI (1,5 bar) - MAX 72PSI (5 bar) (for greater pressures it is necessary to install a pressure reducing valve)
- It is advisable to install a water filtration and softener system in areas with elevated water hardness

Features

- Stainless steel
- Recessed rainhead
- 1 function: rain
- Thermostatic valve required
- Water supply: 1/2”
- Flow rate: 5 GPM (19L/min)

Finishes

Polished Stainless Steel (PSS) | Black (BK) | White Mate RAL9010 (WH) | Brushed Stainless Steel (BSS) | Polished Nickel (PN) | Brushed Black Chrome (BBC) | Brushed Gold (BGD) | Polished Gold (PGD)

Warranty

Residential: Two years warranty
Commercial: Two years warranty

(Complete warranty available at aquabrass.com/warranty)

Code & Compliance

Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice. **Last revision: 23/04/2026**