

C67 C6785

AQUABRASS

/ **Floormount tub filler with handshower**

Specification sheet

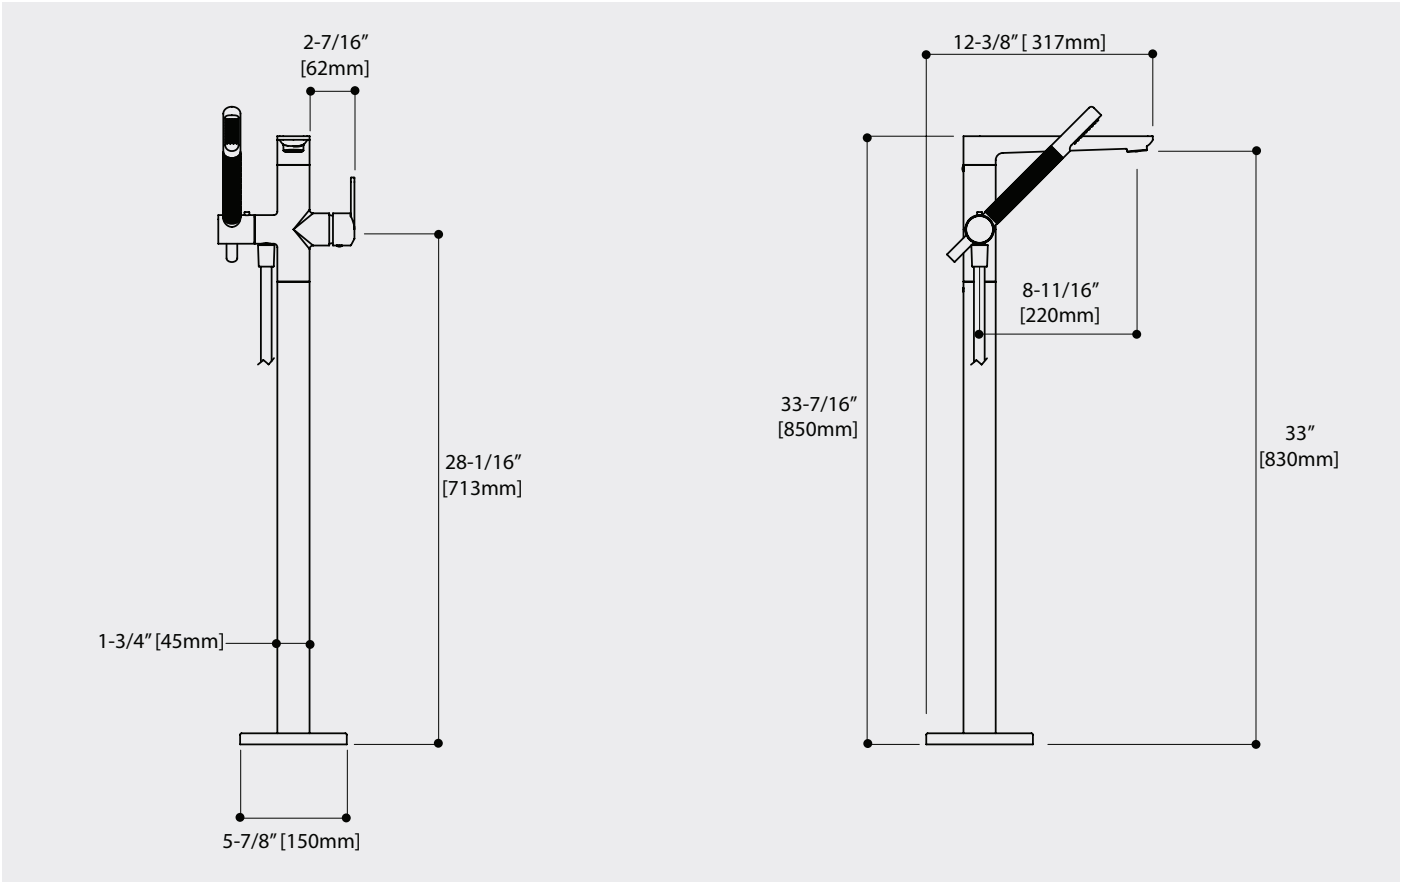

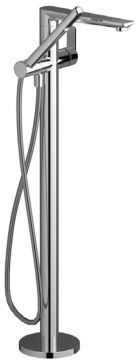

Features
- Solid brass construction
- Crystal clear water flow
- Progressive cartridge diverter
- Handshower with 5’ double-helix brass hose
- 1/2” male connection
- EASY-FIT installation system included

Specs at large
- Overall spout projection: 12-3/8”
- Flow rate (tub filler): 5.25 gpm @ 45 PSI
- Flow rate (handshower): 1.8 gpm
- CC spout projection: 8-11/16”
- Total faucet height: 33-7/16”

Finishes
- Polished Chrome (PC)
- Black (BK)
- Brushed Nickel (BN)
- Polished Nickel (PN)
- Brushed Black Chrome (BBC)
- Brushed Gold (BGD)
- Polished Gold (PGD)

Warranty

Residential: Limited lifetime warranty to original purchaser

Commercial: Two years warranty

(Complete warranty available at aquabrass.com/warranty)

Code & Compliance

Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.


Last revision: 01/07/2025

C67 C6785

AQUABRASS


/ **Floormount tub filler with handshower**


Specification sheet

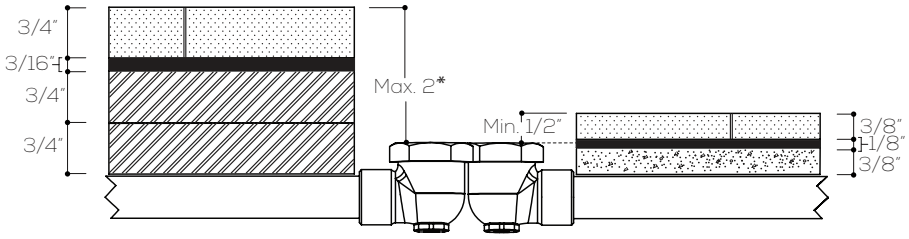

* If set deeper, use commercially available standard male-female extension.

* Si installé plus profondément, utiliser une extension mâle-femelle standard.

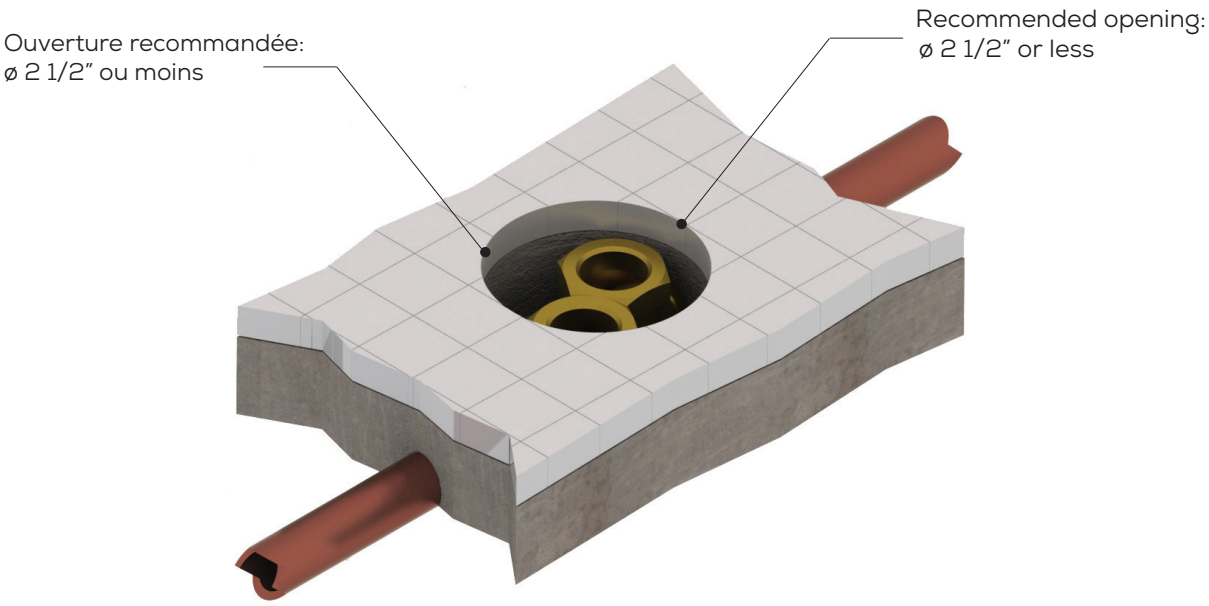

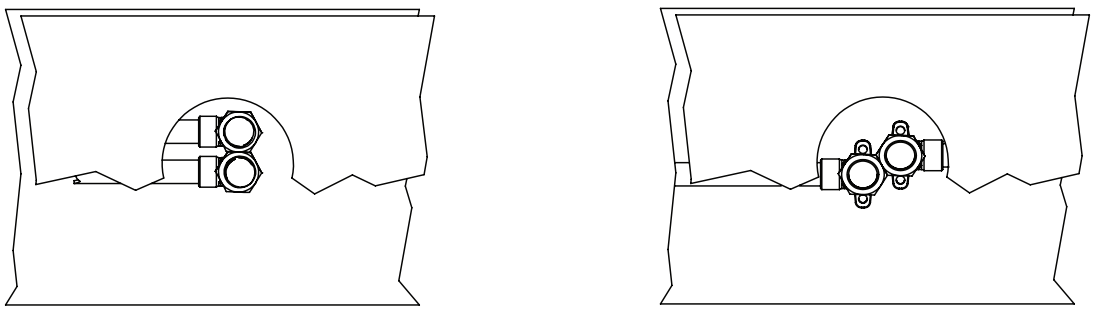

Optimize your rough configuration for a minimum C-C between hot & cold inlets (see examples). The orientation of the pair of supply connections is independent from the final spout position.

Optimiser la configuration du brut pour minimiser le C-C entre l'entrée de l'eau chaude et froide. L'orientation des alimentations n'a aucun impact sur la direction finale du bec.

Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.

Last revision: 01/07/2025