
# Thermostatic Valve T12001

AQUABRASS

/ **TURBO thermostatic valve with 1 shut-off valve**

**Specification sheet**



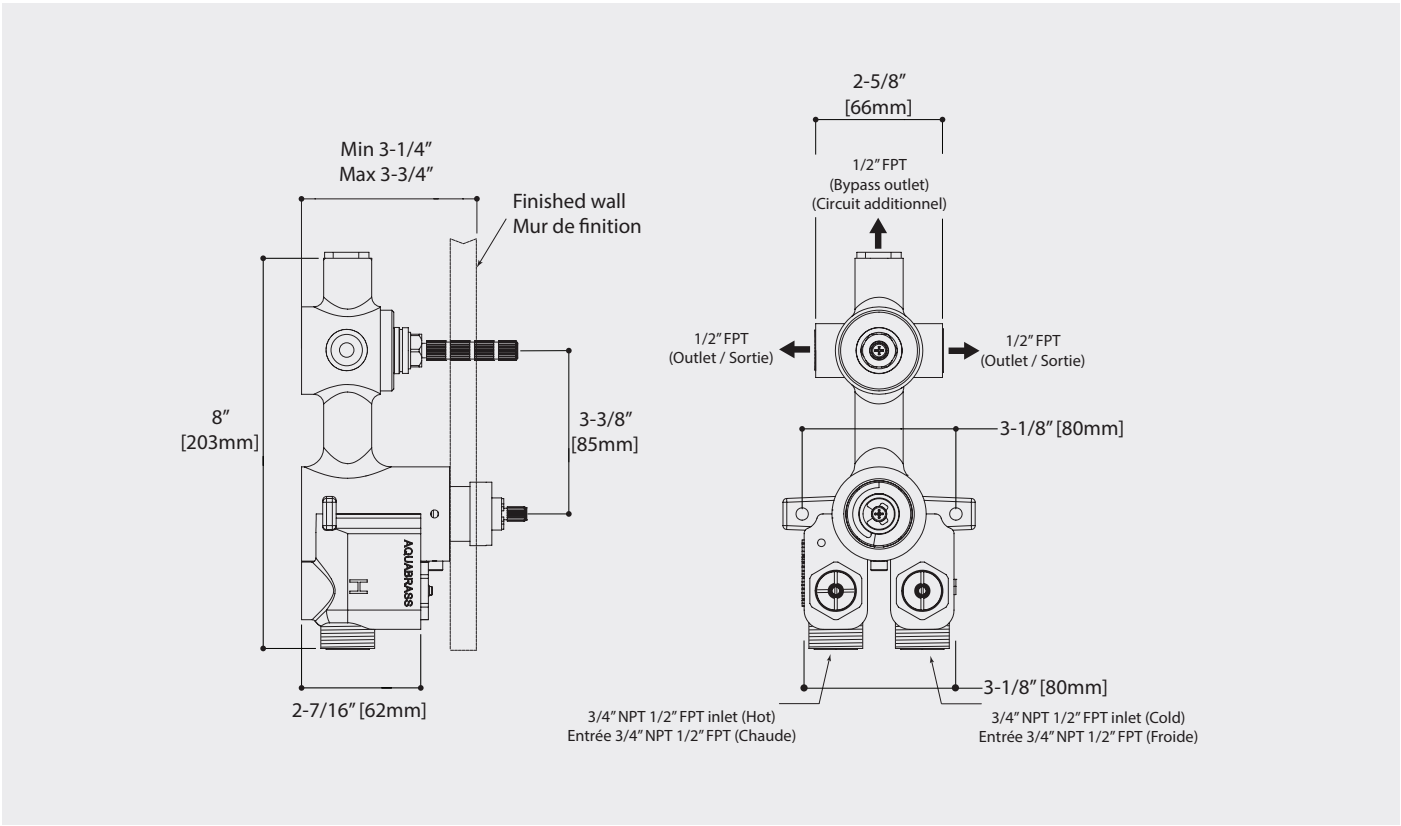


**Features**

- High flow thermostatic cartridge
- Universal inlets for 3/4” and 1/2” connections (built-in female threads for 1/2” connections and male threads for 3/4” connections)
- Reversible service check valves with filters and improved stop mechanism
- Italian made nickel plated solid brass rough and Vernet thermostatic cartridge
- shut-off valve outlets: connections right, left or both sides simultaneously removable NPT plug at the top for an extra independent shut-off valve (#1206) or diverter with stop (#61934) connection vertical water inlets for a fast and efficient installation
- Safety temperature stop, preset at 38°C / 100°F

**Specs at large**

- Flow rate: 12 gpm (45 l/min) at 45 psi

**Warranty**

**Residential**: Two years warranty
**Commercial**: Two years warranty

(Complete warranty available at aquabrass.com/warranty)

**Code & Compliance**

Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice. **Last revision: 05/05/2025**