KOHLER®

# Archer® | K-1949-GHRAW

66" x 32" alcove Heated BubbleMassage™ air bath with Bask® heated surface, right drain

## Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Three heat settings allow you to customize the surface temperature
- 120 airjets release thousands of heated bubbles that surround and support the body in a warm massage
- Automatic and manual purge cycles remove residual water from air channels after use
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Comfort Depth® offers a lower apron with generous soaking depth
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface
- Coordinates with other products in the Archer collection
- Built-in 600 W BubbleMassage™ heater warms humidified air before it enters the bath
- Automatic and manual purge cycles remove residual water from air channels after use
- Built-in 60W electric heater included to keep bath surface warm



## Available Colors/Finishes

***Color tiles intended for reference only.***

| | | |
|---|---|---|
| | 0 | White |
| | 96 | Biscuit |
| | 95 | Ice Grey |
| | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-08-2026 23:34 - US-CA

THE BOLD LOOK OF KOHLER®

## Codes/Standards

***ADA compliant when installed to the specific requirements of these regulations.***

ADA

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
ADA
ICC/ANSI A117.1
cUL Listed
UL Listed

## Technical Information

***All product dimensions are nominal.***

| | |
|---|---|
| Drain Location: | Right |
| Drain Hole Diameter: | 2-1/4" (57 mm) |
| Minimum Flat for Door: | 2-5/8" (66 mm) |
| Basin Area, Bottom: | 50-3/8" x 19-5/8" (1280 mm x 498 mm) |
| Basin Area, Top: | 57-5/16" x 24-1/16" (1456 mm x 611 mm) |
| Water Depth: | 15-5/16" (389 mm) |
| Water Capacity: | 66 gal (249.8 L) |
| Minimum Floor Load: | 46.7 lbs/ft$^2$ |
| Weight: | 109 lbs (49.4 kg) |

## Material

- Acrylic

## Recommended Products/Accessories

- K-1446 Remote installation kit for BubbleMassage™ air baths
- [object Object]23726 Drain treatment
- K-23732 Tub & shower cleaner

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain

or

- K-7272 Slotted overflow bath drain

## Technology

- Auto-shutoff timer on blower allows users to enjoy Heated BubbleMassage™ experience for 60 minutes before turning off
- User interface: two separate electronic keypad controls for Heated BubbleMassage™ and Bask®

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

| | |
|---|---|
| Blower, Heated surface: | 120 V, 15 A, 60 Hz |
| Heater: | 120 V, 15 A, 60 Hz |

## Electrical Component Ratings

| | |
|---|---|
| Blower: | 120 V, 10 A |
| Heated surface: | 120 V, 0.5 A, 60 Hz |
| Heater: | 120 V, 5 A, 60 Hz |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-08-2026 23:34 - US-CA

THE BOLD LOOK OF KOHLER.

## Warranty


***See website for detailed warranty information.***

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-08-2026 23:34 - US-CA

THE BOLD LOOK OF KOHLER.

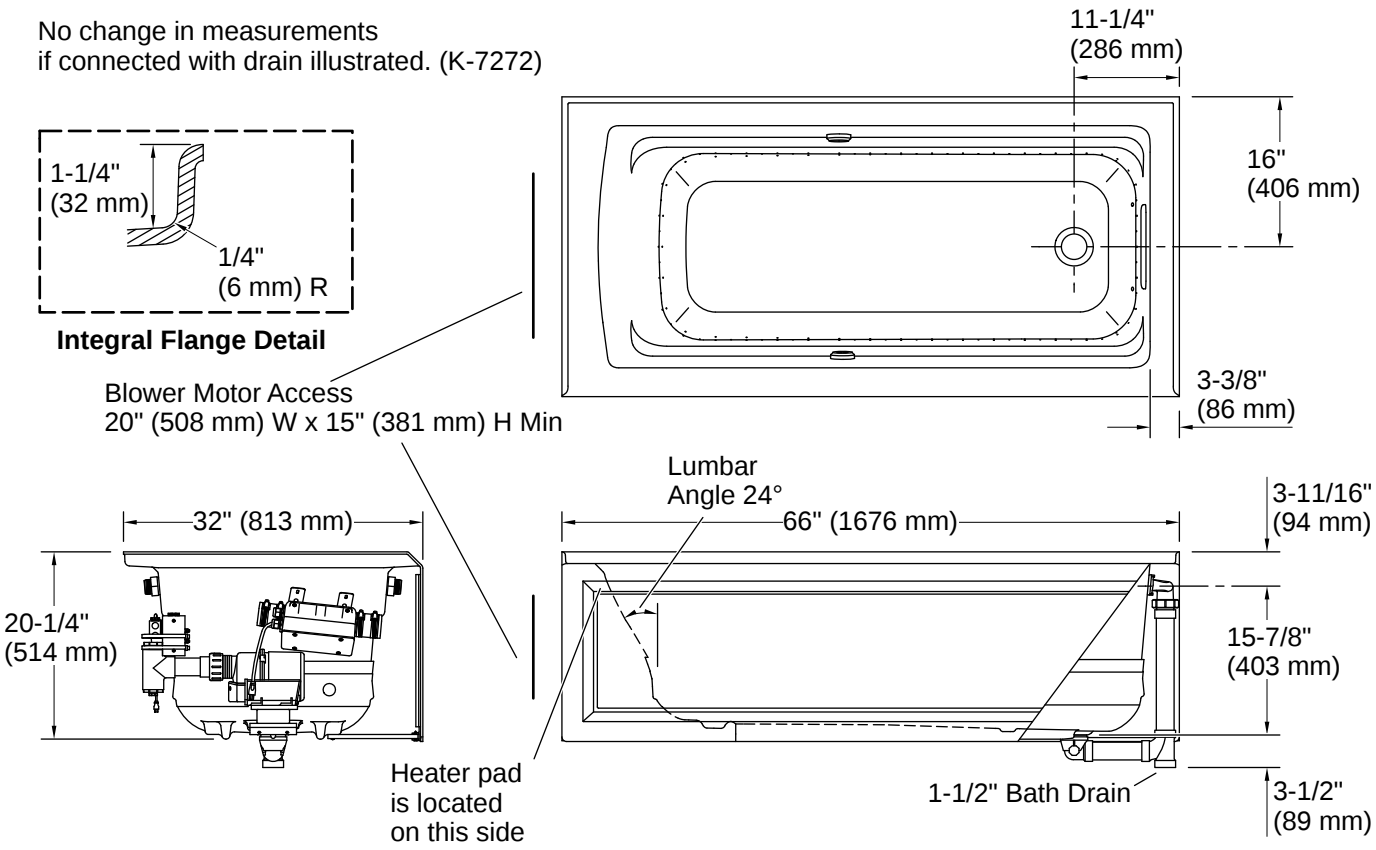


## Installation

- Right drain
- Requires Clearflo slotted overflow bath drain (sold separately)

## Installation Notes

***Install this product according to the installation instructions.***

Measure your actual product for rough-in details.
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.
Remote blower installation kit is available for relocating the blower. Provide access for servicing the blower.
Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly.
ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-08-2026 23:34 - US-CA

THE BOLD LOOK OF KOHLER.