Underscore® | K-5715

65-1/2" x 35-3/4" drop-in bath

Features

- Integral lumbar support
- Oval basin creates a spacious bathing experience
- Slotted overflow allows for deep soaking



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	95	Ice Grey
	7	Black Black

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-30-2026 18:00 - US-CA

Codes/Standards

CSA B45.5/IAPMO Z124

Technical Information

All product dimensions are nominal.

Drain Location:	Center
Drain Hole Diameter:	2-3/16" (56 mm)
Basin Area, Bottom:	47" x 26-1/4" (1193 mm x 666 mm)
Basin Area, Top:	61-3/16" x 28-3/8" (1554 mm x 721 mm)
Water Depth:	17-9/16" (446 mm)
Water Capacity:	85.5 gal (323.7 L)
Minimum Floor Load:	51.7 lbs/ft^2
Weight:	90 lbs (40.8 kg)

Material

- Acrylic

Recommended Products/Accessories

- [object Object]23726 Drain treatment
- K-23732 Tub & shower cleaner
- K-883 Undermount installation kit

Required Products/Accessories

- K-7271 Slotted overflow brass bath drain

or

- K-7272 Slotted overflow bath drain

Warranty


See website for detailed warranty information.


KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-30-2026 18:00 - US-CA


THE BOLD LOOK OF KOHLER®


No change in measurements if connected with drain illustrated. (K-7272)
Recommended Faucet Location

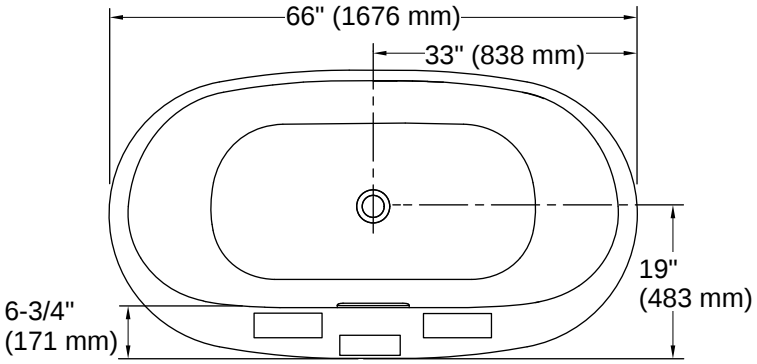

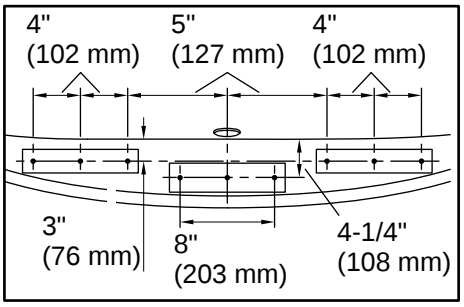

Recommended Faucet Hole Location

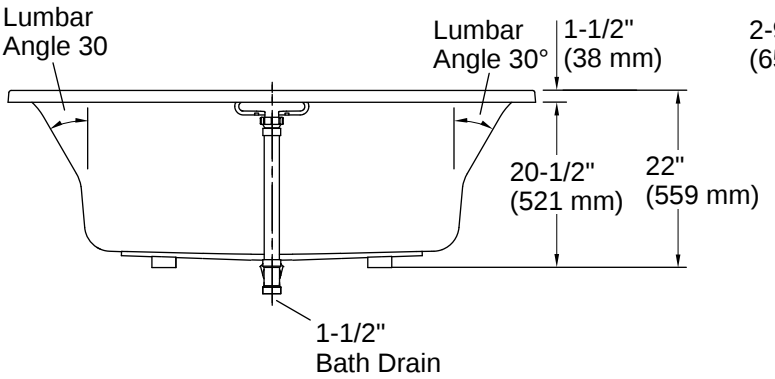

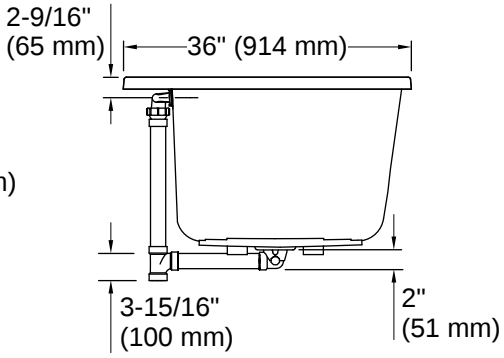

Installation

- Requires Clearflo slotted overflow bath drain (sold separately)
- Center drain
- Drop-in or undermount

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.
If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-30-2026 18:00 - US-CA

THE BOLD LOOK OF KOHLER.