# Bellwether® | K-876

60" x 32" alcove bath, right drain

## Features

- 60" (1524 mm) x 32" (813 mm) x 15-1/2" (394 mm)
- 15" apron height for easy entrance and exit
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Integral apron
- Integral lumbar support



## Sustainability

ENDURES FOR GENERATIONS

## Available Colors/Finishes

***Color tiles intended for reference only.***

| | | |
|---|---|---|
| | 0 | White |
| | 96 | Biscuit |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-24-2026 06:06 - US-CA

## Codes/Standards

***ADA compliant when installed to the specific requirements of these regulations.***

ADA

ASME A112.19.1/CSA B45.2
ASTM F462
ADA
ICC/ANSI A117.1

## Technical Information

***All product dimensions are nominal.***

| | |
|---|---|
| Drain Location: | Right |
| Drain Hole Diameter: | 2-1/4" (57 mm) |
| Minimum Flat for Door: | 2-1/2" (63 mm) |
| Basin Area, Bottom: | 43-7/8" x 21" (1114 mm x 533 mm) |
| Basin Area, Top: | 51-1/4" x 23-5/16" (1302 mm x 592 mm) |
| Water Depth: | 11-5/16" (287 mm) |
| Water Capacity: | 44 gal (166.6 L) |
| Minimum Floor Load: | 52 lbs/ft² |
| Weight: | 327 lbs (148.3 kg) |

## Material

- KOHLER® enameled cast iron

## Recommended Products/Accessories

- K-1601 Bath/whirlpool footstop, removable
- [object Object]23726 Drain treatment
- K-706007-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass
- K-23725 Cast iron cleaner
- K-14426 Wall-mount bath spout
- K-14427 Wall-mount bath spout
- K-706000-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass
- K-706000-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass
- K-706004-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass
- K-706004-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass

## Required Products/Accessories

- K-7259 Brass toe tap bath drain

## Warranty

***See website for detailed warranty information.***


KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-24-2026 06:06 - US-CA


THE BOLD LOOK OF KOHLER®

No change in measurements if connected with drain illustrated. (K-37383)

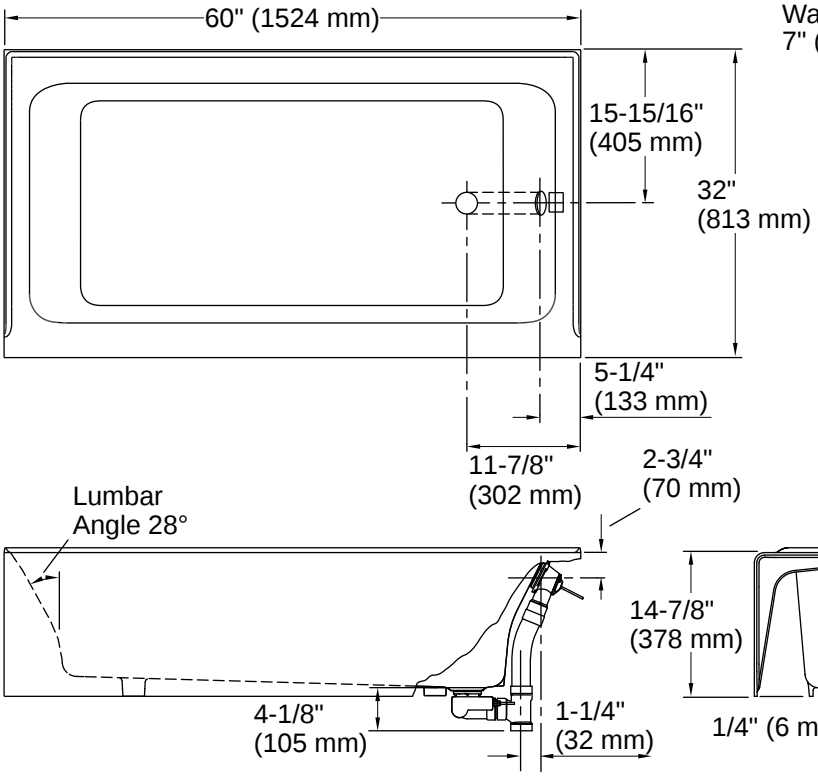


**Note:** To clear the bath rim end wall, a minimum 7" (178 mm) bath spout is recommended. Water flow from angled bath spouts less than 7" (178 mm) may also provide needed clearance.

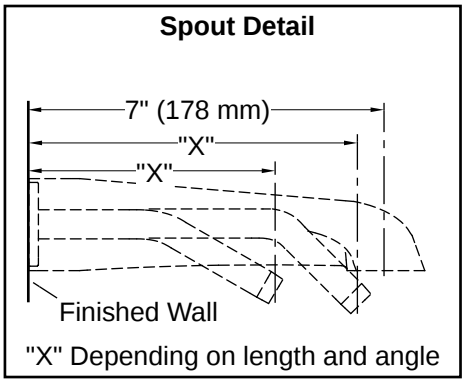

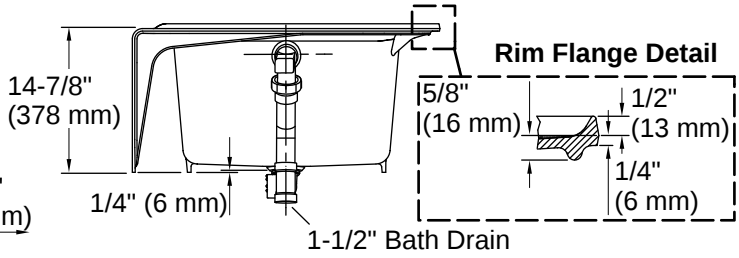
## Installation

- Alcove
- Integral flange

## Installation Notes

***Install this product according to the installation instructions.***

Measure your actual product for rough-in details.
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.
ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-24-2026 06:06 - US-CA

THE BOLD LOOK OF KOHLER